




Functional characteristic curve

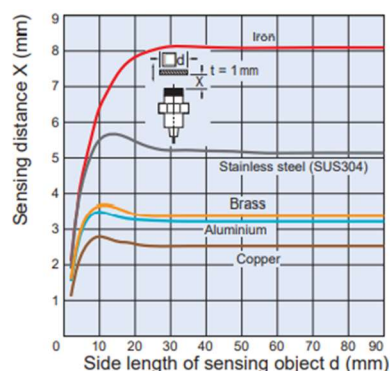

Ordering Information

Item	Size	M18	
	Type	Shielded	Unshielded
	Model	SKC-LF5.0-FKH18-XXXX	SKC-LM8.0-FKH18-XXXX
Sensing distance		5mm±10%	8mm±10%
Setting distance		0 to 4.6mm	0 to 7.5 mm
Detectable object		Ferrous metal	
Standard sensing object(mild steelST37)		18× 18 × 1 mm	
Switching frequency		2000HZ	
Power supply voltage		10 to 30 VDC. (including 10% ripple (p-p))	
Rated current		10 mA max	
Load current		200 mA max. (30 VDC max.)	
Output type		-P models: PNP open collector	
		-N models: NPN open collector	
Operation mode (with sensing object approaching)		O/-C1 models: NO -N/-C2 models: NC	
Indicator		Operation indicator	
Protection circuit		Yes	
Ambient air temperature		Operation and storage : -25 to 70°C	
Protection grade		IP67	
Connecting method	Pre-wired models	PVC cable with length=2m,5m 3pin	
	Connector model	---	
Material	Case	Stainless steel SUS 303	
	Sensing surface	PBT	
	Cable	Standard cable PVC	

Parameter

Model	Sensing distance	Installation	Output type	Connection mode	drawing
SKC-LF5.0-FKD18-POFF2	5mm	Shielded	PNP/NO	Pre-wired	Figure 1
SKC-LF5.0-FKD18-PNFF2	5mm	Shielded	PNP/NC	Pre-wired	Figure 1
SKC-LF5.0-FKD18-NOFF2	5mm	Shielded	NPN/NO	Pre-wired	Figure 1
SKC-LF5.0-FKD18-NNFF2	5mm	Shielded	NPN/NC	Pre-wired	Figure 1
SKC-LM8.0-FKD18-POFF2	8mm	Unshielded	PNP/NO	Pre-wired	Figure 1
SKC-LM8.0-FKD18-PNFF2	8mm	Unshielded	PNP/NC	Pre-wired	Figure 1
SKC-LM8.0-FKD18-NOFF2	8mm	Unshielded	NPN/NO	Pre-wired	Figure 1
SKC-LM8.0-FKD18-NNFF2	8mm	Unshielded	NPN/NC	Pre-wired	Figure 1