




### ■ Features Characteristic Curves

- Rugged, cost-effective, and easy-to-install multi-color indicators
- Illumination provides easy-to-see operator guidance and equipment status indication
- Available in black or light gray housing
- Audible models available with standard, sealed, or omni-directional audible element
- Continuous, pulsed, and staccato tones available
- Lamps of smooth area, making maintenance of surface scrub more easily.
- 18 V to 30 V dc operation

### ■ General Specification

Model No.	SKB-50
Diameter	Φ50.00mm
Shape	One Layer
Voltage	DC24V
Current	Max 30mA
ISignal Polarity	NPN and PNP
protection degree	IP40
Lead Wire	UL1061 AWG26: Red/+, Black/-
Audible	Single-tone
Expected Life	50000H
Operating Temperature	-20°C ~ +50°C
Storage Temperature	-40°C ~ +50°C
Light Source	LED

### ■ Wiring Diagrams — Audible Models

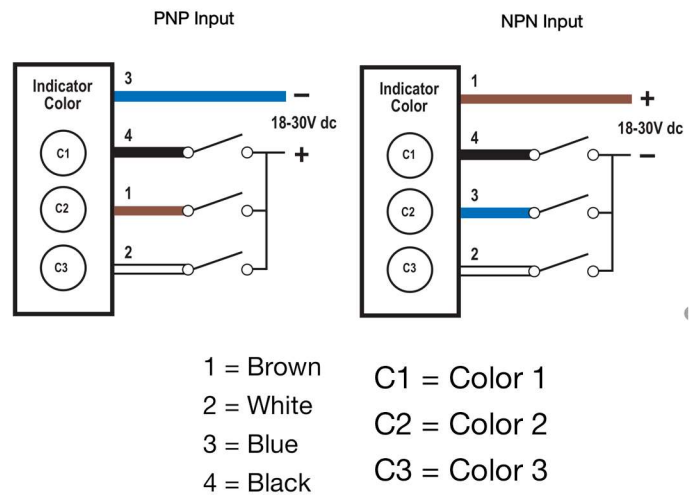

Model	Audible <sup>1</sup>	LED Colors	LED Colors			connection	Inputs
			Color1	Color2	Color3		
SKB-501-GXXP	Yes	1	Green	-	-	Integral 4-pin M12/Line	PNP
SKB-501-GXXN			Green				NPN
SKB-501-RXXN			-	Red			PNP
SKB-501-RXXN			-	Red	-		NPN
SKB-501-RXXPA			-	Red	-		PNP
SKB-501-RXXNA			-	Red	-		NPN
SKB-501-GXXPB			Green	-	-		PNP
SKB-501-GXXNB			Green	-	-		NPN

This information is reference spec, so final spec may