


Features Characteristic Curves

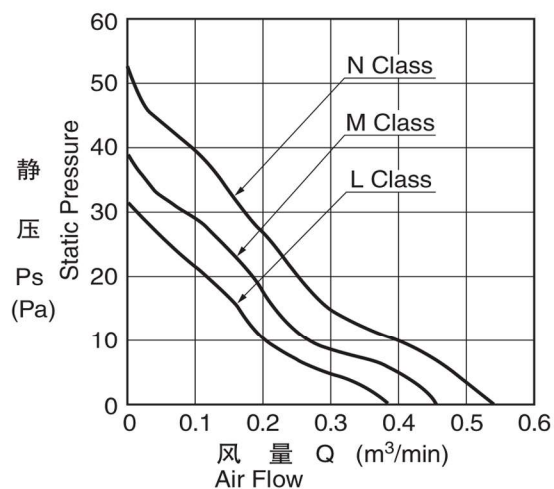

General Specification

Model No.	SKF-060-12
Motor Protection	Auto Restart/Polarity
Insulation Resistance	10MΩ over with a DC500V MeggerProtection
IDielectric Withstand Voltage	AC700V 1s
Casing	Plastic(Black)94V-0
Impeller	Plastic(Black)94V-0
Bearing	Sleeve Bearing
Lead Wire	UL1061 AWG26: Red/+, Black/-
Expected Life	40°C 30,000Hours
Failure Rate	10%
Operating Temperature	-10°C ~ +60°C
Storage Temperature	-40°C ~ +60°C
Dimension(W*H*D)(mm)	60*60*15

Model	Product No	Rating Voltage	Operating Voltage	Current	Input Power	Speed	Max.Air Flow		Max.Static Pressure		Noise	Mass	
		(V)	(V)				(m³/min) ^{*1}	(CFM) ^{*1}	(Pa)	(In H ₂ O)			
SKF-060-12L	00	12	6.0-13.8	0.09	1.08	3600	0.40	14.1	31.3	0.13	28	45	
SKF-060-12M	00			0.13	1.56	4100	0.45	15.9	39.7	0.16	31		
SKF-060-12N	00			0.16	1.95	4600	0.52	18.4	51.2	0.21	34		
SKF-060-24L	00	24	12.0-27.6	0.06	1.44	3600	0.40	14.1	31.3	0.13	28		
SKF-060-24M	00			10.0-27.6	0.07	1.68	4100	0.45	15.9	39.7	0.16		31
SKF-060-24N	00				0.10	2.4	4600	0.52	18.4	51.2	0.21		34

Rotation:Clockwise as seen from the lable side

Airflow Outlet: Label side

This information is reference spec,so final spec may change.